




SMART MAG FILTER

2019 Chrome

Brass - Transparency

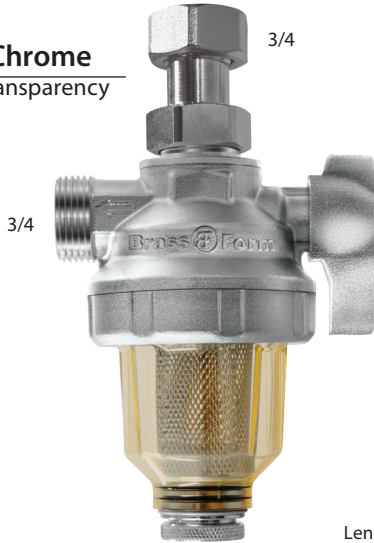

Length: 126mm
Maximum Operating pressure: 6 bar / Operating Temperature: 95 °C

CODE	CONNECTIONS	€	☐
2019	CHROME Plated	3/4" Male x 3/4" Fem.	3

The package includes :
Connection (3434) 3 / 4" Female. x 3/4" Swivel

New

10 YEARS
GUARANTEE

2020 Electrostatic

Brass - Transparency



Length: 126mm
Maximum Operating pressure: 6 bar / Operating Temperature: 95 °C

CODE	CONNECTIONS	€	☐
2020	WHITE Electrostatic	3/4" Male x 3/4" Fem.	3

The package includes :
Connection (3434) 3 / 4" Female. x 3/4" Swivel

3434

Connection no fix fitting




CODE	CONNECTION	€	☐
3434	3/4" Fem. x 3/4" Swivel		10

SPECIAL FEATURES


- Operating Temperature: 0 / 95°C
- Maximum Operating pressure: 6 bar
- Compatible Fluid: Water, Water & Glycol
- Magnets: Neodymium N48
- Filter Cartridge: AISI304 (800µm)
- Chamber Capacity: 180 ml
- Connections: ISO 228 / (3/4" Fem. x 3/4" Male.)

Smart Mag-Filter

Pressure Drop Diagram

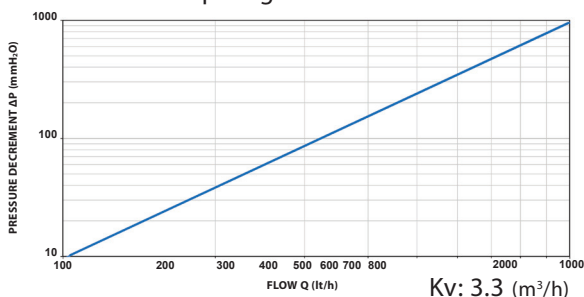

TECHNICAL FEATURERS

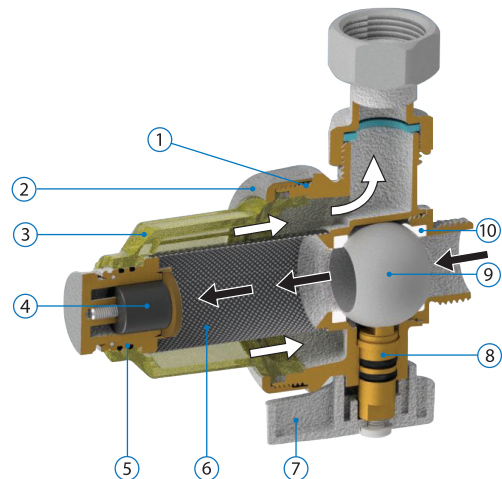

- 1 **Filter Main Body**
Hot Forged Brass (cw617N)
- 2 **Locking Nut**
Hot Forged Brass (cw617N)
- 3 **Collection Chamber**
Polysulfone (PSU)
- 4 **Magnet** Neodymium N48
- 5 **Orings** NBR
- 6 **Filter Cartridge**
AISI304 (800µm)
- 7 **Knob**
Thermoplastic ABS polymer
- 8 **Spindle**
Brass (cw614N)
- 9 **Ball**
Brass (cw614N), Polished, chromium plated
- 10 **Ball Seats** Protogenic PTFE